

Liquid Filter

At A Glance



Protection: Secondary



Feed Type: Pumped / Liquid Line



Material Type: NdFeb



Cleaning Type: Manual

Our high intensity liquid filter magnetic separator has been designed to operate in pressurised transfer lines to provide protection against ferrous and para-magnetic contamination.

The housing comprises a vessel, magnetic lid assembly and band clamp, which secures the unit together. The filter is available in two versions, single wall and double wall (jacketed for heated pipelines).

The filter can be used in any line that processes liquids at all viscosity levels and can be installed at any angle from vertical to horizontal. A common installation location is tanker loading and discharge to inspect outgoing and incoming materials. The filter can be supplied to suit various processing volumes, pressures, temperatures and specifications.



Benefits

- Easy to clean
- Meets audit requirements
- No consumables
- Removes sub-micron sized contaminants

Performance

Magnetic Performance	7000, 9000, 10000, 11000 (Fixed) & 12000 (Fixed) Gauss
Performance Reading	On tube surface
Magnet Grade	N35 & N45 – Inspected and confirmed via hystero-graph prior to use
Temperature	-20°C / +90°C
Pressure	+ 6.0 Bar

Suitability

Suitable Products	Chocolate, molasses, jam, syrup, juice, sauce, pastes, soup, pickles, spreads, beverages etc.
Suitable Location	All, vertical, horizontal or angled

Materials



Magnetic Material	Rare Earth Neodymium Iron Boron - (NdFeb)
Housing	316 grade stainless steel
Tubing	316 grade stainless steel
Other Parts	304 grade stainless steel
Sealing	Silicon rubber O-ring
Surface Finish	Brushed internally / Polished externally to 1.2µm

Cleaning

To clean, simply release the quick release band clamp, remove the contaminated cartridge from the housing and remove the magnetic cores from the tube assembly. All attracted contamination can be easily removed allowing for inspection or further analysis.

Options


- Pharmaceutical specification
- Overpressure to 30 Bar
- Safety relay switch
- Hygienic Fittings
- Higher temperature versions available

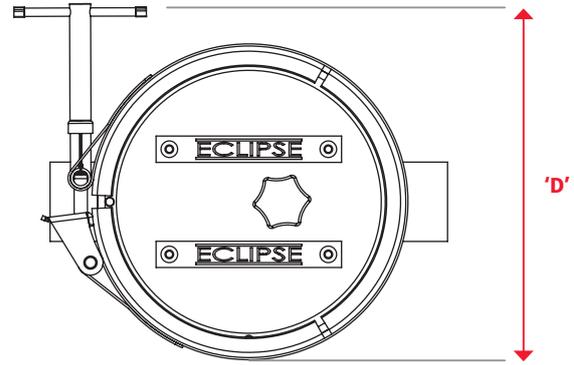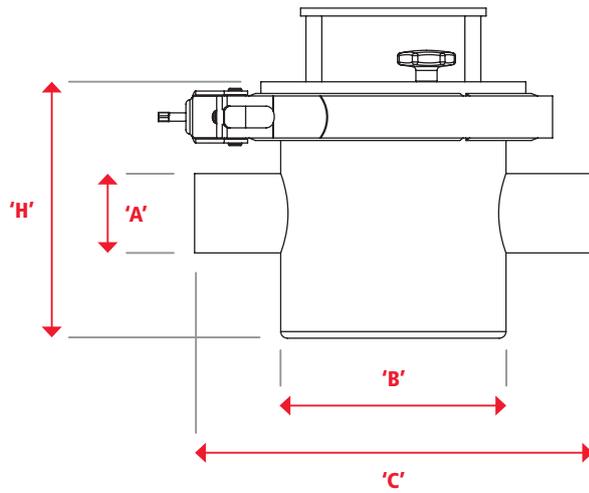


Part Number (Single Wall)	Spout Dia. A (mm)	Dia. B (mm)	C (mm)	D (mm)	H (mm)	Number Of Rods	Weight (kg)
ILF110/50 (See diagram below)	40	128	250	175	170	3	11
ILF140/75 (See diagram below)	50	146	270	190	190	5	17
ILF200/50	50	170	350	260	200	7	22
ILF200/75	75	170	350	260	200	7	22
ILF300/50	50	260	450	360	300	9	36
ILF300/75	75	260	450	360	300	9	36
ILF300/100	100	260	450	360	300	9	36

Part Number (Jacketed)	Spout Dia. A (mm)	Dia. B (mm)	C (mm)	D (mm)	H (mm)	Number Of Rods	Weight (kg)
ILF200/50/J	50	200	350	260	220	7	22
ILF200/75/J	75	200	350	260	220	7	22
ILF300/50/J	50	300	450	360	300	9	36
ILF300/75/J	75	300	450	360	300	9	36
ILF300/100/J	100	300	450	360	300	9	36

ILF110/50

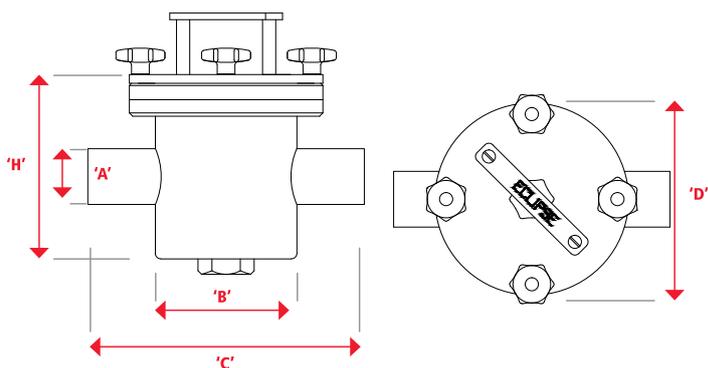

ILF140/50

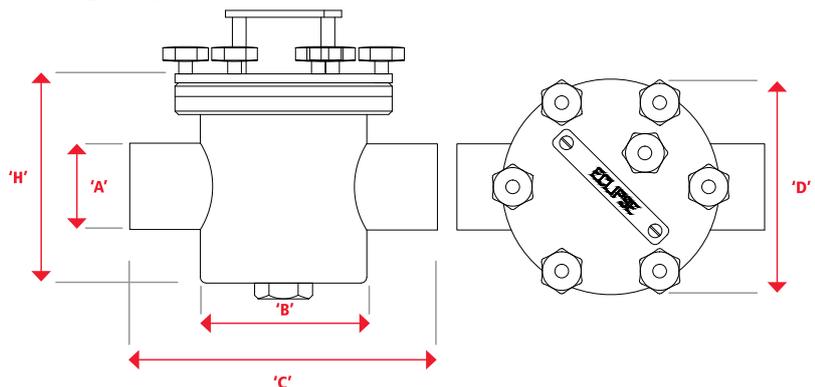

For non-standard sizes, please contact sales@eclipsemagnetics.com